



## ®IRGANOX 1076


### Phenolic Primary Antioxidant for Processing and Long-Term Thermal Stabilization

**Characterization**    ®IRGANOX 1076, a sterically hindered phenolic antioxidant, is highly efficient, non discoloring stabilizer for organic substrates such as plastics, synthetic fibers, elastomers, adhesives, waxes, oils and fats. It protects these substrates against thermo-oxidative degradation. ®IRGANOX 1076 is odorless, stable to light and has excellent color retention. It has good compatibility with most substrates, low volatility and high resistance to extraction.

**Chemical Name**    Octadecyl-3-(3,5-di-tert.butyl-4-hydroxyphenyl)-propionate

**CAS Number**      2082-79-3

#### Structure

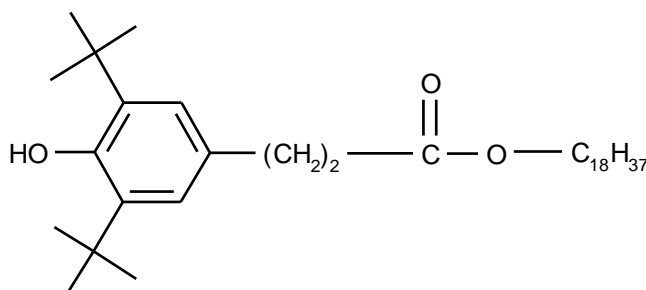

**Molecular weight**    531 g/mol

**Applications**      ®IRGANOX 1076 can be applied in polyolefins such as polyethylene, polypropylene, polybutene-1 as well as in other polymers such as engineering plastics, styrene homo- and copolymers, polyurethanes, elastomers, adhesives, and other organic substrates.

**Features/ Benefits**    ®IRGANOX 1076 can be used in combination with other additives such as costabilizers (e.g. thioesters, phosphites, phosphonites), light stabilizers, and other functional stabilizers. The effectiveness of the blends of ®IRGANOX 1076 with ®IRGAFOS 168 (®IRGANOX B-blends) or with ®IRGAFOS 168 and Lactone HP-136 (®IRGANOX HP-products) is particularly noteworthy.

#### Product Forms

Code:  
 ®IRGANOX 1076  
 ®IRGANOX 1076 FF (C)  
 ®IRGANOX 1076 FD

Appearance:  
 white powder  
 white, free-flowing granules  
 white, free-flowing, dust free pastilles

Distributed by  
**Wi**

---

**Guidelines for use** 500 ppm - 2000 ppm of <sup>®</sup>IRGANOX 1076 provide long-term thermal stability to the polymer. Concentrations up to several percent can be used depending on the substrate and the requirements of the end application.

---

In polyolefins the concentration levels for <sup>®</sup>IRGANOX 1076 range between 0.1% and 0.4% depending on substrate, processing conditions and long-term thermal stability requirements. The optimum level is application specific.

<sup>®</sup>IRGANOX 1076 is recommended for styrene homo- and copolymers at a concentration level ranging from 0.1 to 0.3 %.

Concentration levels of <sup>®</sup>IRGANOX 1076 in hot melt adhesives range from 0.2% to 1% and in synthetic tackifier resins between 0.1% and 0.5%.

Extensive performance data of <sup>®</sup>IRGANOX 1076 in various organic polymers and applications are available upon request.

---

### Physical Properties

Melting Range	50 - 55°C
Flashpoint	273°C
Vapor Pressure (20°C)	2.5 E-7 Pa
Bulk density	Powder: 260 - 320 g/l

<b>Volatility</b> (TGA, in air at 20°C/ min)	
Temp. at 1% weight loss	230°C
Temp. at 10% weight loss	288°C

<b>Solubility (20°C)</b>	% w/w
Water	< 0.01
Acetone	19
Benzene	57
Chloroform	57
Cyclohexane	40
Ethanol	1.5
Ethylacetate	38
n-Hexane	32
Methanol	0.6
Toluene	50

---

**Handling & Safety** In accordance with good industrial practice, handle with care and prevent contamination of the environment. Avoid dust formation and ignition sources.  
For more detailed information please refer to the material safety data sheet.

---

**Registration** <sup>®</sup>IRGANOX 1076 is listed on the following Inventories:

Australia: AICS	Canada: DSL	China: First Import
Europe: EINECS	Japan: MITI	Korea: ECL
Philippines: PICCS	USA: TSCA	

---

<sup>®</sup>IRGANOX 1076 is approved in many countries for use in food contact applications. For detailed information refer to our Positive List or contact your local sales office.

**IMPORTANT:** The following supercedes Buyer's documents. **SELLER MAKES NO REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED, INCLUDING OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** No statements herein are to be construed as inducements to infringe any relevant patent. Under no circumstances shall Seller be liable for incidental, consequential or indirect damages for alleged negligence, breach of warranty, strict liability, tort or contract arising in connection with the product(s). Buyer's sole remedy and Seller's sole liability for any claims shall be Buyer's purchase price. Data and results are based on controlled or lab work and must be confirmed by Buyer by testing for its intended conditions of use. The product(s) has not been tested for, and is therefore not recommended for, uses for which prolonged contact with mucous membranes, abraded skin, or blood is intended; or for uses for which implantation within the human body is intended.

---